


## Robex Epoxy Crete Primer

A clear resin adhesive for use with Robex Vertical E Crete and any of the E Crete systems when being applied as a screed.

E Crete primer is ideal for use on very porous surfaces and where even greater adhesion is required. E Crete Primer can also be used as a primer on damp surfaces, prior to the application of any E Crete product.

- Tremendous adhesion
- Excellent adhesion to damp surfaces
- Very low odour

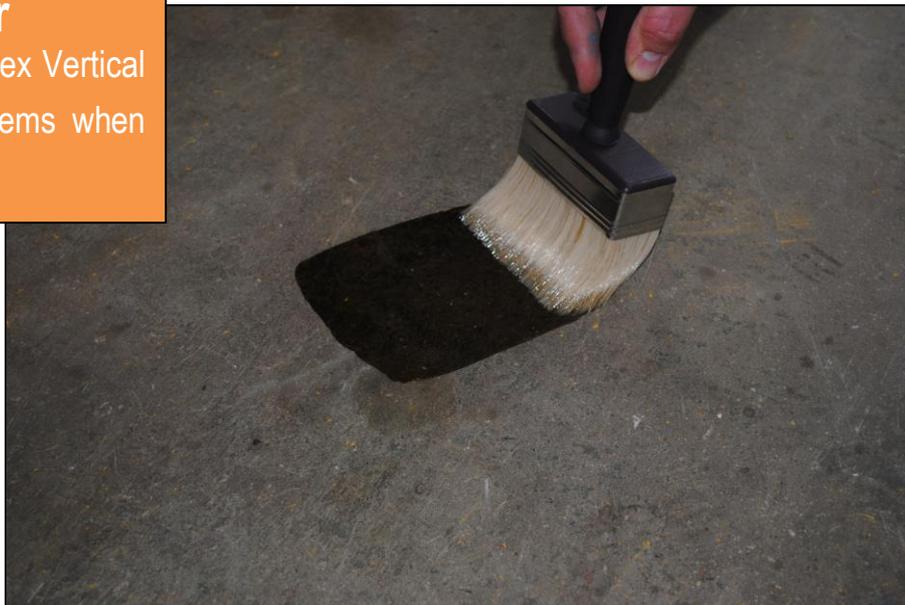

### • Preparation

New concrete should be at least 21-18 days old or the moisture content less than 5%.

The substrate should be sound, clean and free from laitance, oil, grease or other agents which may impair adhesion.

### • Mixing

E Crete Primer is supplied in pre-weighed packs. Add the contents of the Base to the Reactor and mix thoroughly. Once mixed the primer should be applied immediately and should not be allowed to become tack free prior to the application of the E Crete Systems.

### • Application

Apply by brush or roller ensuring a continuous film. Avoid over-application and puddles. Porous floors may require two coats.

### • Coverage

Approx. 4m<sup>2</sup> per pack

### • Cleaning

To clean brushes, equipment, contaminants, etc., we recommend the use of RX117 Robex Brush Cleaner.

### • Pot Life @ 20°C:

35-40 minutes

### • Flash Point:

>100°C

### • Shelf-Life

Minimum 24 months in original sealed containers and at ambient temperatures.



**In Person:** Should you have any queries regarding product application, one of our trained sales engineers is always on hand to sort out any problems you may have.

**On line:** All of our technical data sheets and health & safety data sheets are available to download on line.

**On site:** If you would like Robex to apply your product for you call on the number below, we manufacture, we supply and we apply.